

CR AG

# LITHIUM MANGANESE DIOXIDE




## Features & Benefits

- Superior long term reliability
- High current pulse discharge capability
- Wide operating temperature (-40°C to 70°C)
- High safety and energy density


## Specifications

Nominal Capacity:	2400 mAh Typical
Nominal Voltage:	3V
Weight:	Approximately 17g
Operating Temperature:	-40°C - +70°C


## Dimensions

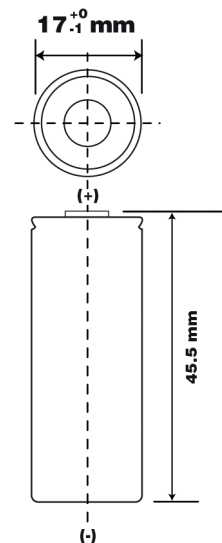


## Pulse Discharge Characteristics

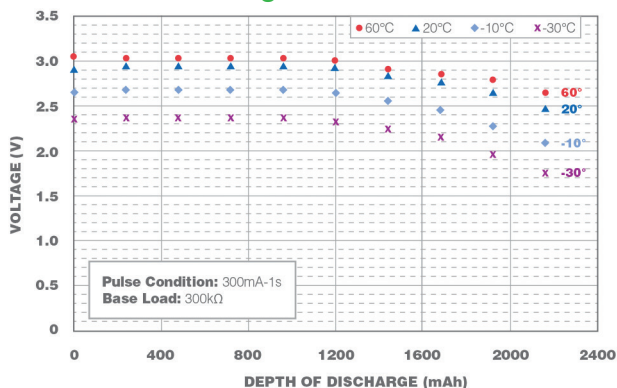

## Long Term Discharge 30kΩ (without wake-up pulse)

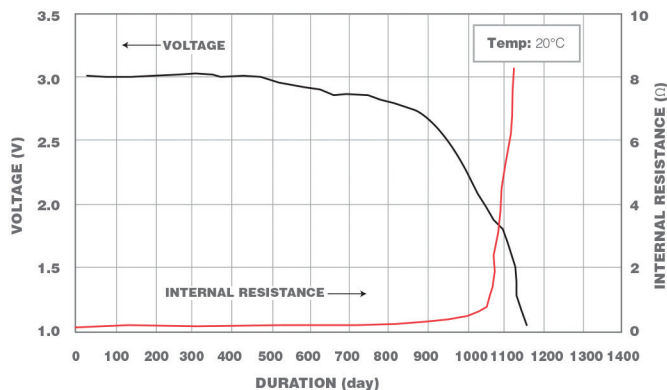

## Discharge Curves (1kohm)

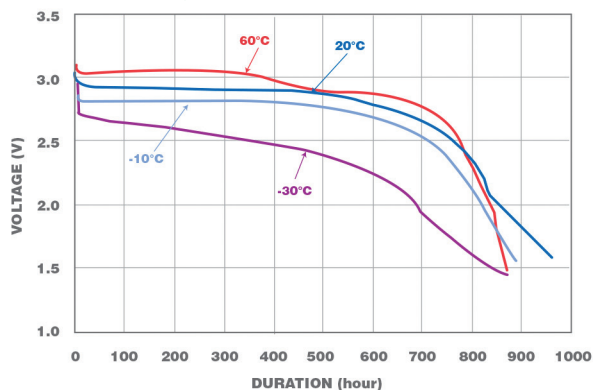

## Long Term Discharge 300kΩ (without wake-up pulse)

