

# CR-2/3AZ LITHIUM MANGANESE DIOXIDE




## Features & Benefits

- Superior long term reliability
- High current pulse discharge capability
- Wide operating temperature (-40°C to 70°C)
- High safety and energy density


## Specifications

Nominal Capacity: 1600 mAh Typical  
 Nominal Voltage: 3V  
 Weight: Approximately 17g  
 Operating Temperature: -40°C - +70°C


## Dimensions

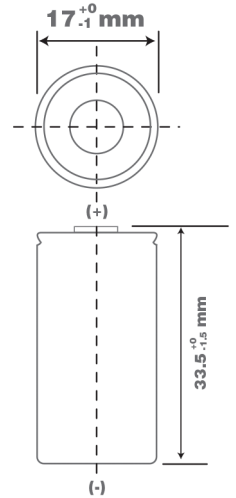


## Pulse Discharge Characteristics

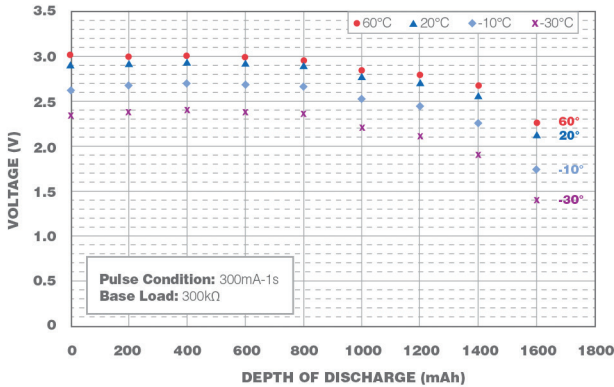

## Long Term Discharge 100kΩ (without wake-up pulse)

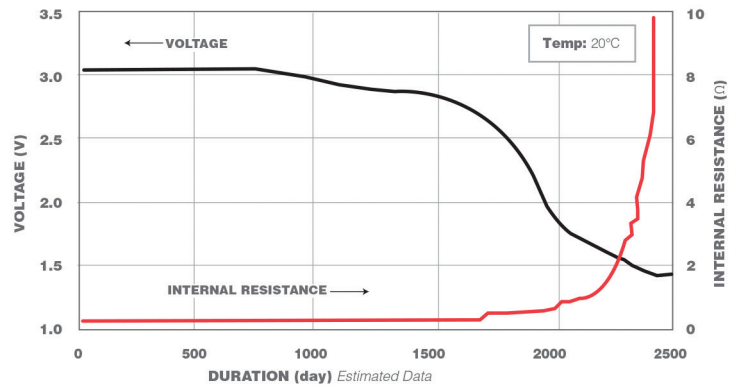

## Discharge Curves (1kohm)

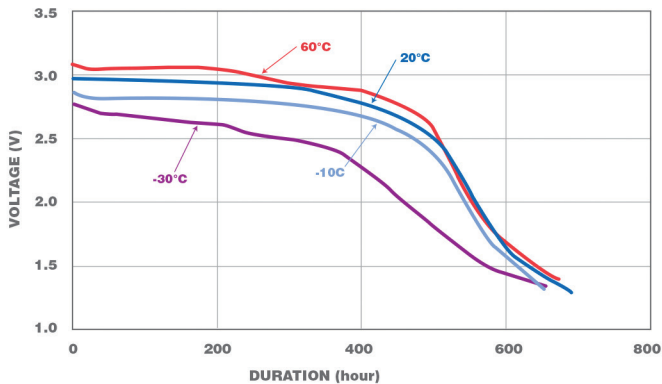

## Long Term Discharge 300kΩ (without wake-up pulse)

