

# CR2 LITHIUM MANGANESE DIOXIDE



### Features & Benefits


- Operating temperature range between -40° C to +70° C
- High current pulse discharge capability
- Stable voltage level during discharge
- High safety and reliability

### Specifications


Nominal Capacity:	850 mAh
Nominal Voltage:	3V
Weight:	Approximately 11g
Operating Temperature:	-40°C - +70°C*

\*Please consult Panasonic for use below and above -20°C to +60°C

### Dimensions

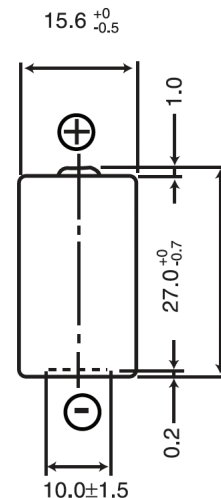


### Temperature Characteristics

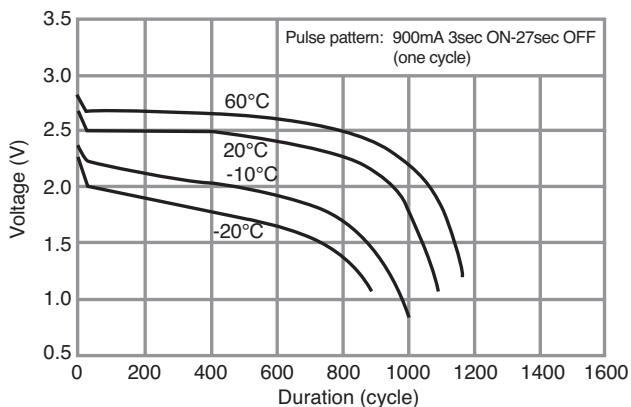


\*Please consult Panasonic for use below and above -20°C to +60°C

### Continuous Discharge Characteristics (60°C)

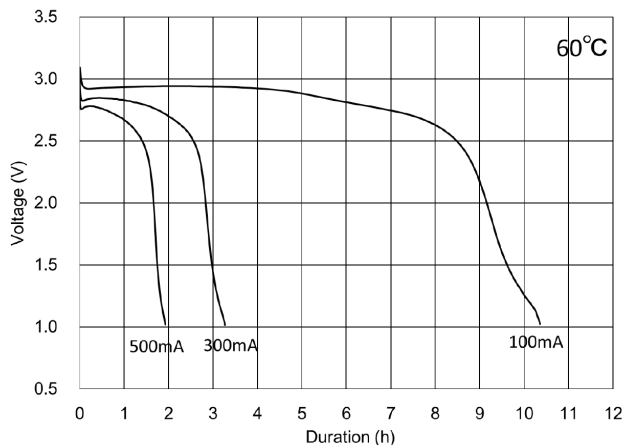

### Continuous Discharge Characteristics (20°C)

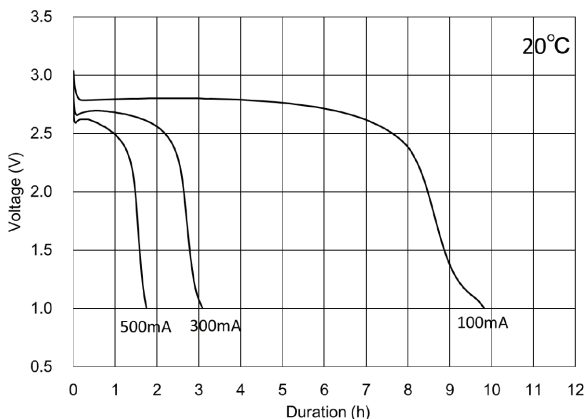

### Continuous Discharge Characteristics (-20°C)

